


Water Requirements:

- 3/8" BSP dedicated cold water line with shut-off valve. In North America, 3/8" compression to 3/8" NPT Male fitting is needed and will be slightly cross threaded into 3/8" BSP water line
- Incoming water pressure: 3 Bar minimum, 5 Bar maximum
- Water hardness can not exceed 50ppm, otherwise a water softener is needed

Counter Space Requirements:

- Width: 17.7", 45.0cm
- Depth: 24.3", 61.7cm
- Height: 13.4", 34.0cm
- Weight: 100 lbs/45.5kg (dry), 110 lbs/50kg (boilers filled)

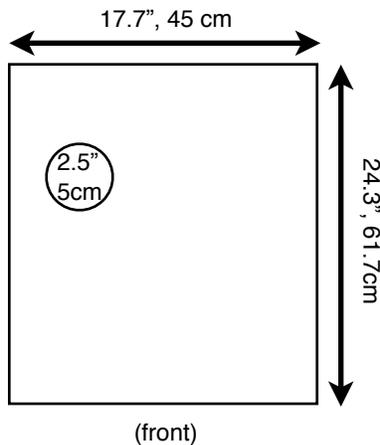

Drain Requirements:

- Open gravity drain located within 4 feet, 1.2 meters of the machine.
- Please ensure drain line is always sloping downwards
- Drain hose: 7/8"OD, 5/8"ID. 2.2cm OD, 1.6cm ID

Power Requirements:

- 100-120 VAC, Single Phase
- 1500 Watts
- 15 Amps
- Standard grounded plug end included

or

- 200-240 VAC, Single Phase
- 2000 Watts
- 10 Amp
- Receptacle: Nema 6-15

* please note, male plug end is NOT included with 220 volt version of the machine and must be supplied by client

